

PROLU

Specialize in Cold Forming since 1998

Email: vikixu@prolu.cn
skype: vikixu66
wechat,whatsapp:15588894521



ABOUT US

Shandong Prolu Machinery Technology Co.,Ltd is the Global business company of shunda and yuanxu,behind steel ball cold heading machine and screw cold heading machine of ProLu, is the "cold heading" engineering mastery of 21 years of shunda and yuanxu.

Our development basic on continuing research of the productions,high-quality system,and raw material supply chin system. All machines and spare parts are 100% qualified be test by JinanBureau of quality and technical supervision,all meet the china and CE standard.

We have 90% market share in china with steel ball cold heading machine,and screw cold heading machine be sold in china in 5 years.

---Total 16000m²,workshop 10000m², office area 1000m²,4 spare parts warehouses, 7 workshops

---R&D team:27 engineers,spare parts process team:80 workers and machine assembly team:40 workers

---30 lathe,12 high precision CNC lathe,17 middle-size CNC center of lathe,2 large-size CNC center of lathe

---95% self-produce spare parts of steel ball and screw cold heading machine,independent research,

high-precision process,quality guarantee



Jinan Shunda Steel Ball Equipment Co.,Ltd

Main business: Manufacturer and domestic trading company of Steel ball cold heading machine since 1998.



Jinan Yuanxu Machinery Equipment Co.,Ltd

Main business: Manufacturer and domestic trading company of Screw cold heading machine and Screw packing machine since 2014.



Shandong Prolu Machinery Technology Co.,Ltd

Main business: International trading company of Shunda and Yuanxu since 2019.



Screw Cold Heading Machine



型号 Model	最大长度 Max.Length (mm)	生产能力 RPM (pcs/min)
JYX15-30G	30	300
JYX15-37G	45	220
JYX15-50G	55	200
JYX15-63G	65	155
JYX15-76G	80	140
JYX15-100G	110	105



PROLU

昌路机械科技

螺丝冷镦机(380V)

Screw Cold Heading Machine(380V)

序号 Item	1	2	3	4	5
产品名称 Model	JYX15-37G	JYX15-50G	JYX15-63G	JYX15-76G	JYX15-100G
最大外径 Max.blank diameter (mm)	2.3-5				
最大长度 Max.blank length (mm)	40	55	65	80	110
生产能力 RPM (pcs/min)	220	200	155	140	105
主模外径 Main die diameter (mm)	34.5*55	34.5*67	34.5*80	34.5*100	34.5*115
一冲模 1st punch die (mm)	31*73				
二冲模 2nd punch die (mm)	31*73				
剪刀模 Cut-off die (mm)	19*35				
剪刀 Cutter (mm)	10*32*63				
主电机功率 Motor power (KW) (4HP)	3				
油泵电机功率 Oil pump power (KW)(1/4HP)	0.33				
整机尺寸 Machine size (M ³)	2.1×1.05×1.1	2.1×1.05×1.1	2.15×1.1×1.1	2.3×1.1×1.1	2.3×1×1.1
	2.3×1.1×1.45	2.3×1.1×1.45			
重量 Weight (KG)	2000	2000	2100	2100	2100
	2300	2300			


附：1. 以上标准配置含直线器与料架。

2. 机械防护分为半防护与全防护。3. 若另需打头机电脑或输料机，请另行咨询。

Attach:1. Machine including wire straightener and wire shelf.


2. Protection:half or full.3. Need auto checker or conveyor,please consult.

**JYX15-37G,JYX15-50,we offer two kinds of protection.
Half protection(Left) and Full protection(Right)**

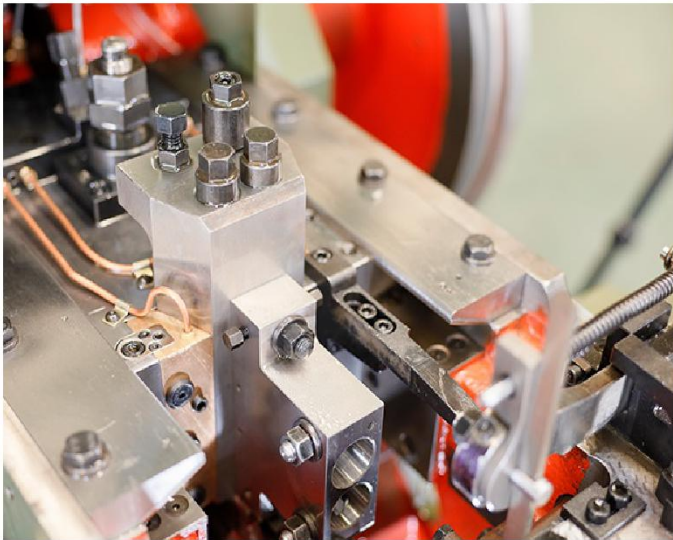

- *Vertical sliding plate,widen and thicken, size . entirety quench. Slide stabilization.
- *Sliding block, cast alloy steel
- *Mould pedestal, high processing accuracy.
- *Pull rod,spring pedestal,straight line pedestal, knife rest pedestal, precision cast steel
- *Install sliding block baseplate,shock absorption,antiwear,lengthen using life.
- *Oil line reasonable layout, lubricate all parts.

- *Curve sliding plate, entirety, without insert.
- *Crankshaft,high strength and toughness,antiwear alloy steel,widen and thicken.
- *Lifting transmission plate,cutting by laser cutting machine.impact toughness well, high strength.
- *Second axle cam, control the accuracy 3%-5% millimeter

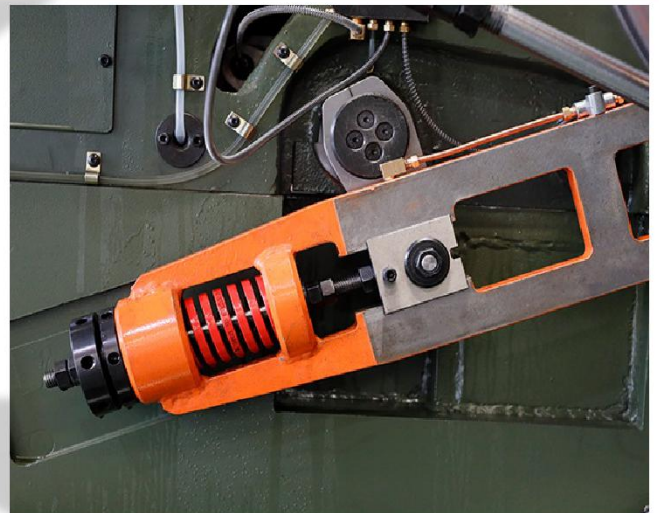

- *Auto stop without lubricating oil
- *Taiwan Electrical motor
- *Main electric circuit : Schneider

Shandong Prolu Machinery Technology Co.,Ltd
Sales manager: Viki xu
Email: vikixu@prolu.cn
Skype: vikixu66
Phone,Wechat,Whatsapp: 15588894521
[Website: www.prolu.cn](http://www.prolu.cn)

